


General Electric Power Generation A50A493 & 3003M70P Equivalent Silicone Rubber Tape

Operating temperature: -65°F to +500°F / -54°C to 260°C; Brittle temperature -85°F / -65°C
FlameShield™ Silicone Rubber Self Fusing Compression & Stretch Electrical Insulating Tape

Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant

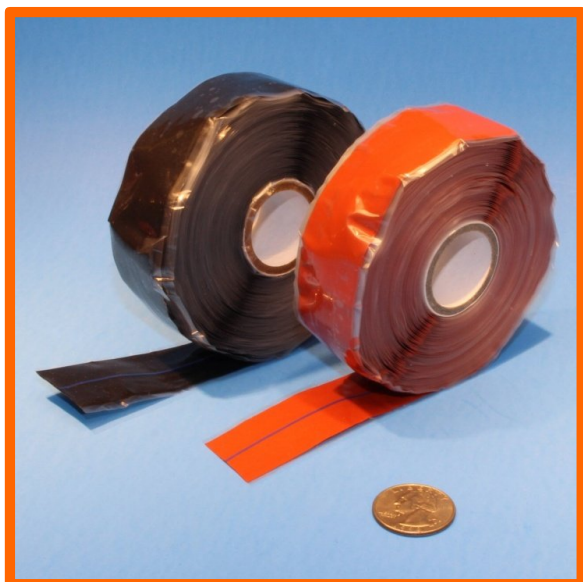

- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing within minutes, fully bonded within hours. Excellent cold weather performance. Makes an excellent compression tape.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening.
- Meets Mil-I-46852 and AA59163 and other proprietary specifications.
- CofC available.
- Meets 14 CFR 25.853(a) at amendment 25-116; Appendix F, Part I(a)(1)(i) (60 Second Vertical Flammability Test).

FlameShield™ General Electric Power Generation Standard A50A493 & 3003M70 High Temperature Silicone Rubber Self Fusing Compression/Stretch Tape		
Part Number	Tape Width Inches / mm	Tape Thickness Inches / mm
A50A493A Tape:		
T-SR-GEPG-93A-TOR-16-20	1 / 25	0.020 / 0.51
A50A493B Tape:		
T-SR-GEPG-93B-TOR-16-40	1 / 25	0.040 / 1.02
A50A493C Tape: (supported)		
T-SR-GEPG-93C-ROR-1S-16-20	1 / 25	0.020 / 0.51
A50A493D Tape: (supported)		
T-SR-GEPG-93D-ROR-1S-48-30	3 / 76	0.030 / 0.76
3003M70P01 Tape:		
T-SR-GEPG-P01-TOR-16-20	1 / 25	0.020 / 0.51
3003M70P02 Tape:		
T-SR-GEPG-P02-RBK-12-20	3/4 / 19	0.020 / 0.51
3003M70P03 Tape:		
T-SR-GEPG-P03-RBK-08-20	1/2 / 13	0.020 / 0.51
3003M70P04 Tape:		
T-SR-GEPG-P04-TBK-24-60	1-1/2 / 38	0.060 / 1.52

- Standard roll length is 36 feet / 12 Yards / 10.9 Metres; other lengths available.
- All versions of A50A493 are Oxide-Red